


Lazy Jack


Install instructions

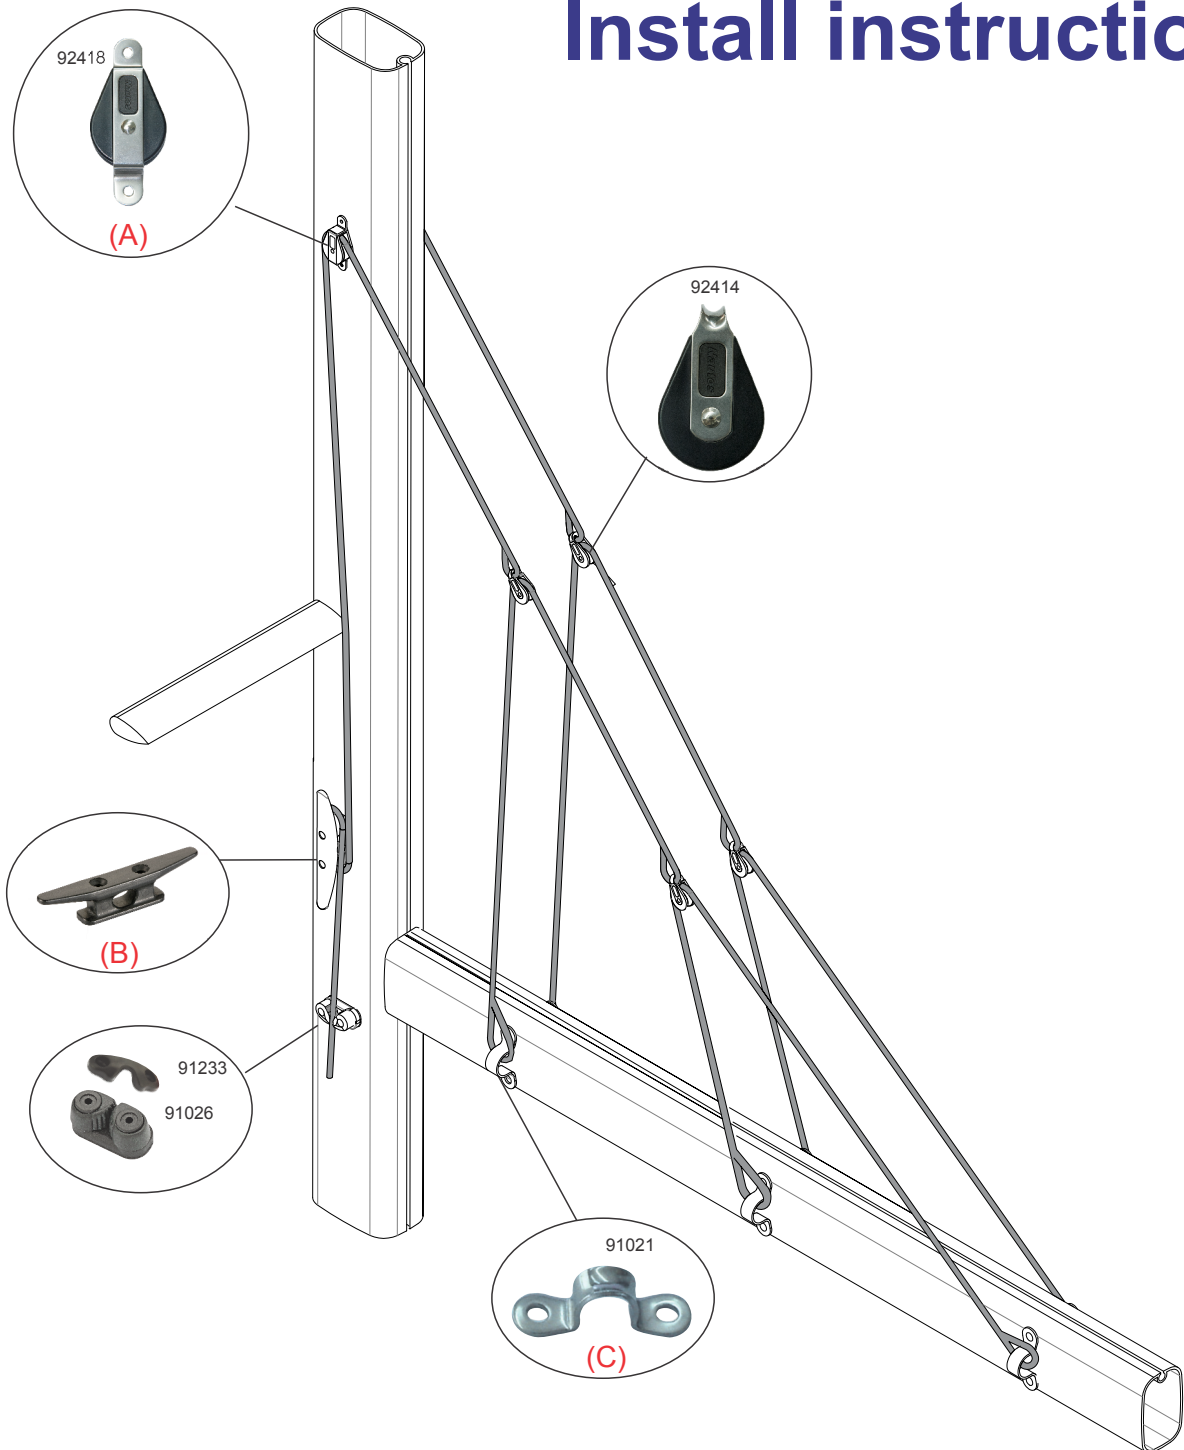

NautosTM

Up to 31'

HT91915 - Lazy Jack HT91915NRJ - Lazy Jack + fastenings

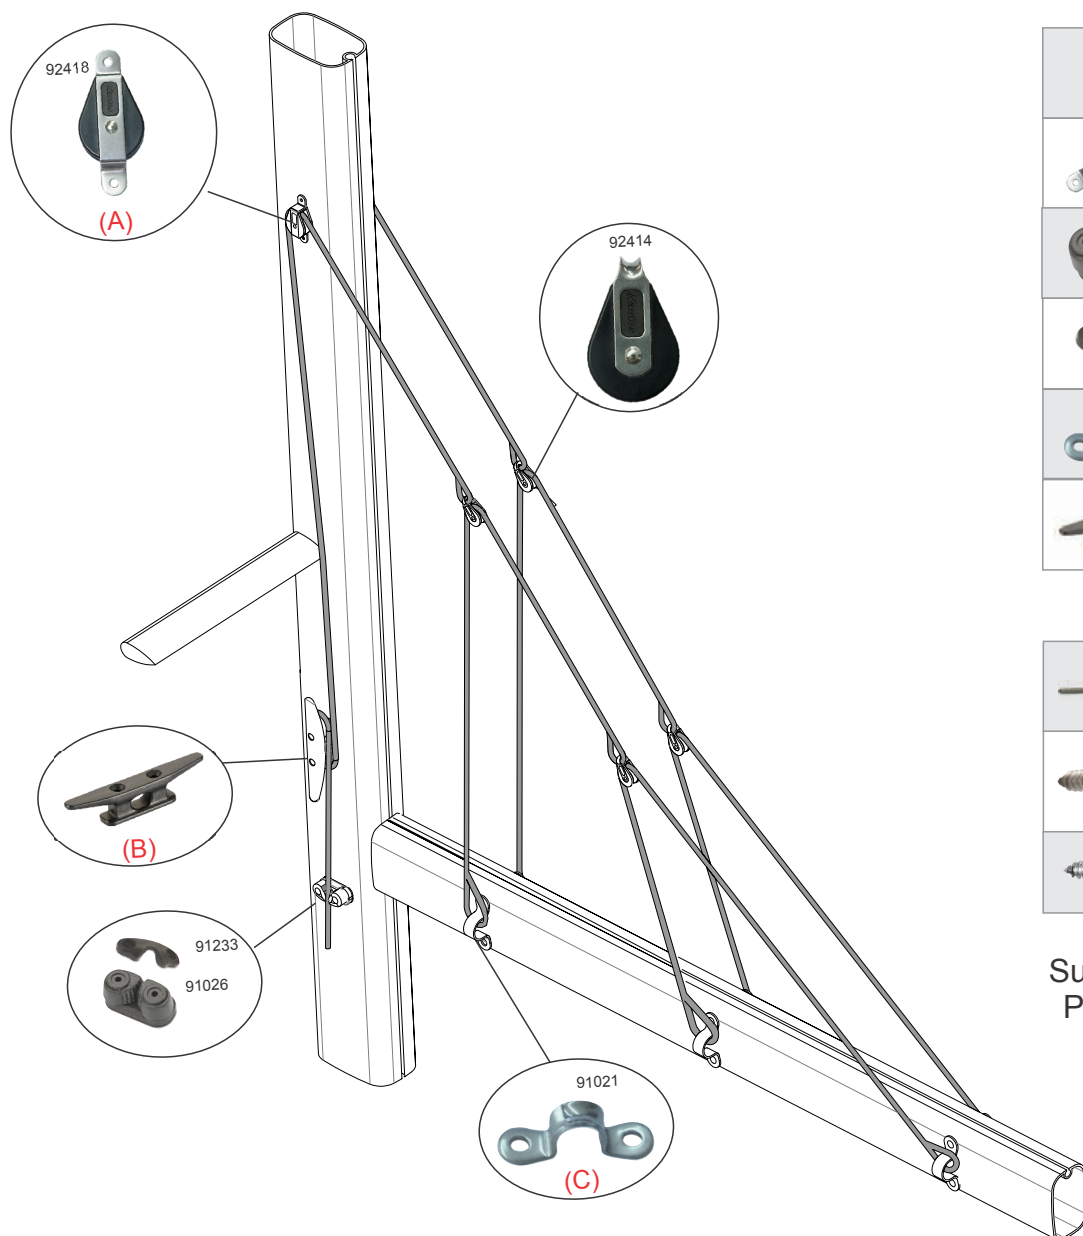

	Code	Qty
	92414	4
	92418	2
	91026	2
	91233	2
	91021	6
	36.215	2

Fastenings


	5mm	16
	4mm x 38mm	4
	5mm x 32mm	4

Suggested rope and length
Polyester 5mm and 60m.

- 1) Attach the cheek block (A) at a height corresponding to 75% (3/4) of the total mast height;
- 2) Around the gooseneck height install the cleat (B) at a clear lateral area of the mast where the rope comes straight from block (A);
- 3) The first eye strap (C) should be attached at least 65,00cm (2.5 feet) away from the mast. Then divide the remaining space and install the rest proportionally. Eye straps can be attached with screws or rivets.

From 32' up to 38'

HT91916 - Lazy Jack
HT91916NRJ - Lazy Jack + fastenings

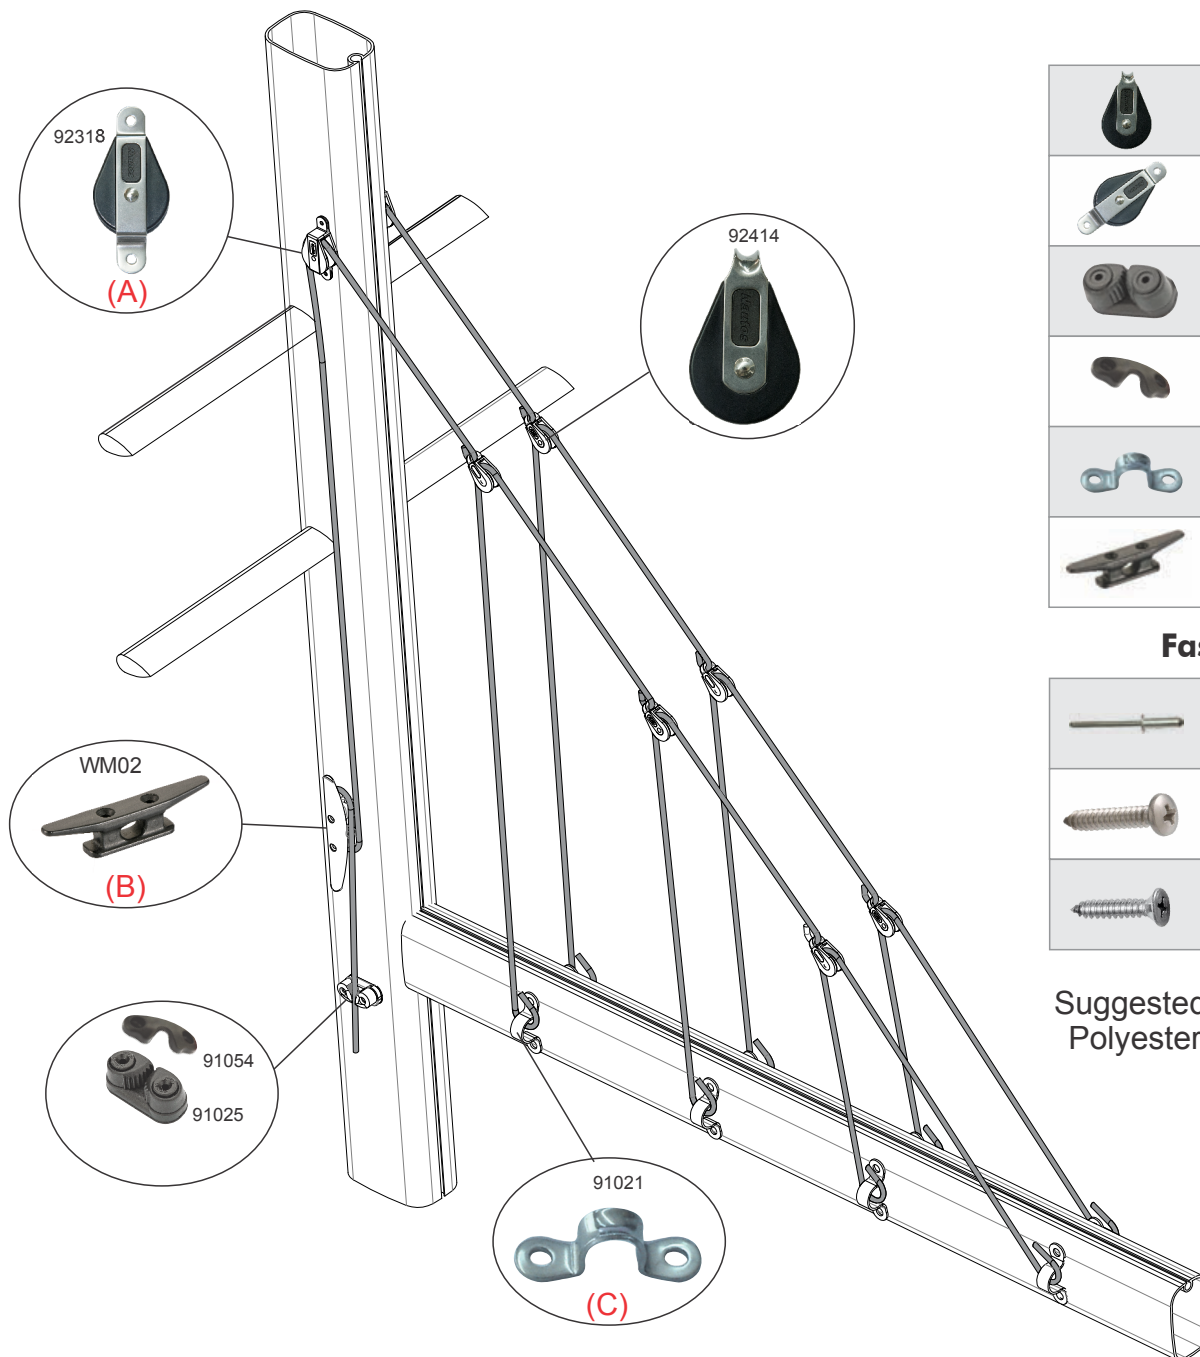

	Code	Qty
	92414	6
	92318	2
	91025	2
	91054	2
	91021	8
	36.215	2

Fastenings


	5mm	20
	5mm x 50mm	4
	5mm x 32mm	4

Suggested rope and length
Polyester 6mm and 70m.

- 1) Attach the cheek block (A) at a height corresponding to 75% (3/4) of the total mast height;
- 2) Around the gooseneck height install the cleat (B) at a clear lateral area of the mast where the rope comes straight from block (A);
- 3) The first eye strap (C) should be attached at least 65,00cm (2.5 feet) away from the mast. Then divide the remaining space and install the rest proportionally. Eye straps can be attached with screws or rivets.

From 39' up to 46'

HT91917 - Lazy Jack
HT91917NRJ - Lazy Jack + fastenings

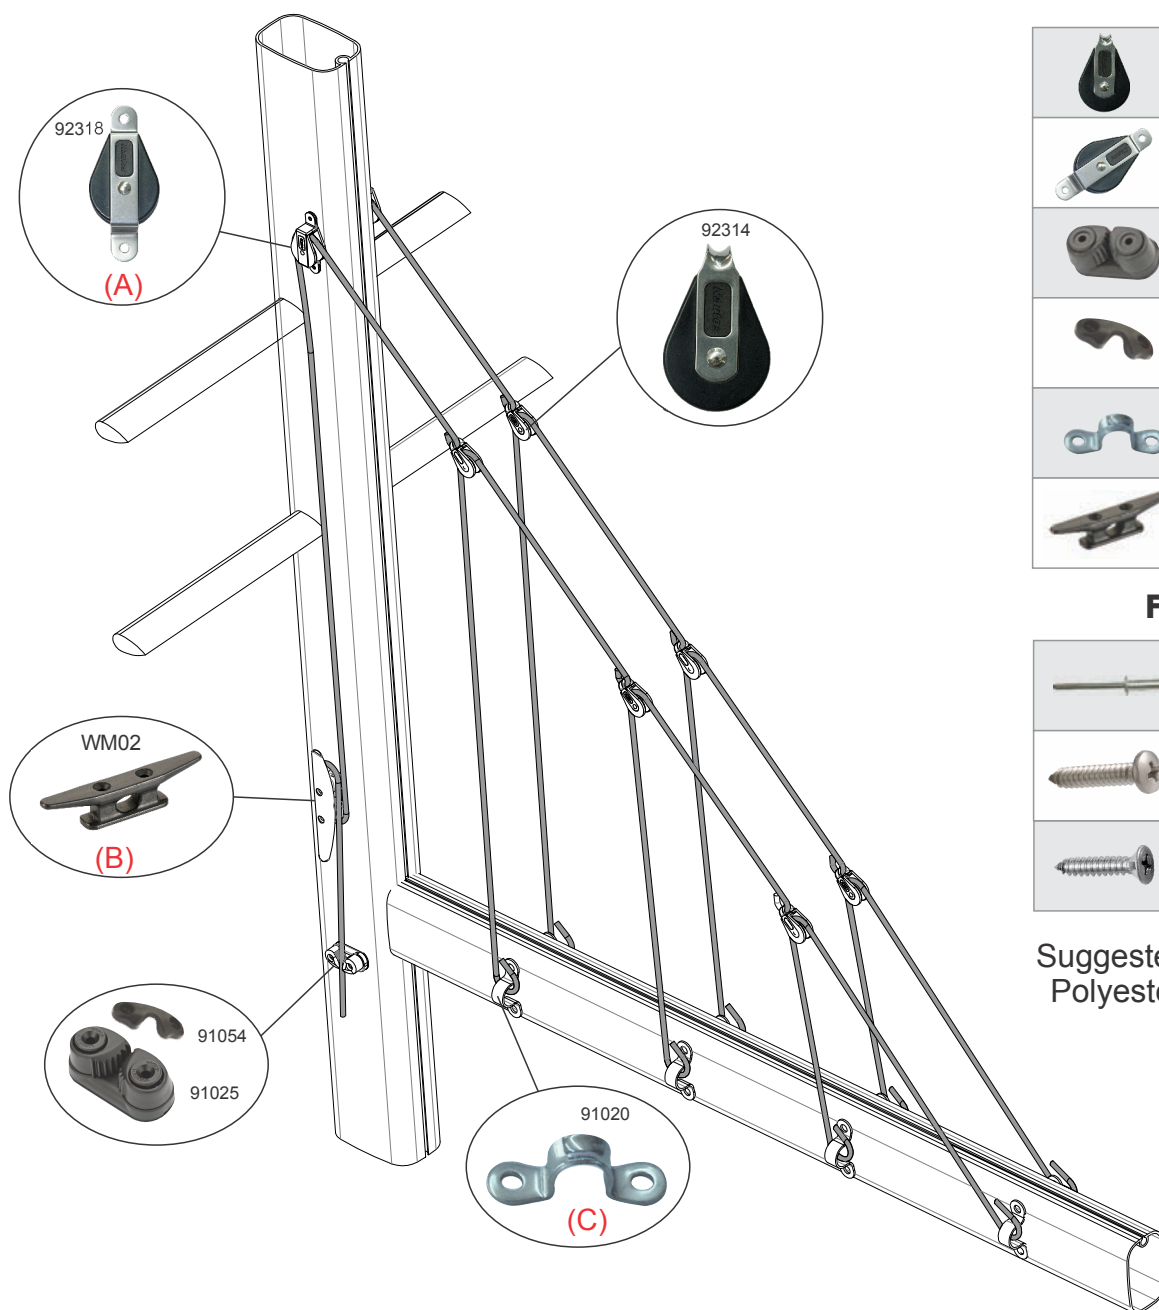

	Code	Qty
	HT92314	6
	HT92318	2
	HT91025	2
	HT91054	2
	HT91020	8
	HT36.215	2

Fastenings

	6mm	20
	5mm x 50mm	4
	5mm x 32mm	4

Suggested rope and length
Polyester 6mm and 83m.

- 1) Attach the cheek block (A) at a height corresponding to 75% (3/4) of the total mast height;
- 2) Around the gooseneck height install the cleat (B) at a clear lateral area of the mast where the rope comes straight from block (A);
- 3) The first eye strap (C) should be attached at least 65,00cm (2.5 feet) away from the mast. Then divide the remaining space and install the rest proportionally. Eye straps can be attached with screws or rivets.